
# Flat Entry 6P4C RJ-11 Plug (Stranded Wires)

## PRODUCT SPECIFICATION

## Package includes:

A. Flat Entry 6P4C Plug, 100 pcs

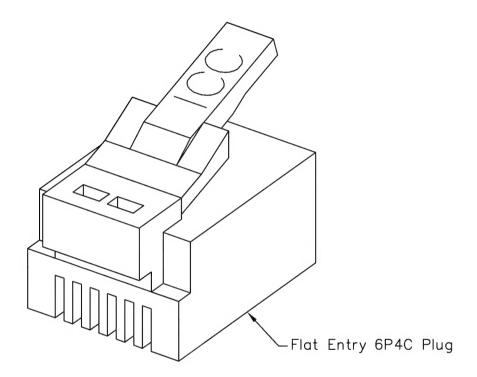


### **Features and Benefits:**


- Designed for 6-position 4-conductor, stranded wires, flat line cord entry
- Ideal for customization of cords for voice or other low speed transmission applications
- Accepts 28~24 AWG stranded wires
- Used with ICACSCT864 crimping tool
- UL recognized


PLUG, 6P4C,	FLAT ENTRY, STRAI	NDED, 100 PK	
ITEM NO.	ICMP6P4CFT	REV. A	
DWG NO.	PSMP6P4CFT	PAGE NO. 1	





 $\texttt{CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com / 14700 Alondra Blvd., La Mir$ 











### **NOTE: UNLESS OTHERWISE SPECIFIED**

- 1. ELECTRICAL:
  - A. UL APPLICATIONS: RATED 2A, 150V
  - B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
  - C. INSULATION RESISTANCE: 500 MOHMS
  - D. TERMINATION RESISTANCE: 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING
- 2. MECHANICAL:
  - A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN
  - B. DURABILITY: 200 MATING CYCLES
- 3. MATERIAL & FINISH:
  - A. HOUSING: PC, UL 94V-2
  - B. COLOR: CLEAR
  - C. CONTACT: HIGH STRENGTH COPPER ALLOY, GOLD PLATING OVER 100 MICRO INCH NICKEL
  - D. GOLD PLATING: 1.27 MICRON/50 MICRO INCH MIN
  - E. CONDUCTOR: 24, 26, 28 AWG STRANDED

PLUG, 61	P4C, FLAT ENTRY	, STRANDED, 100 PK
ITEM NO.	ICMP6P4CFT	REV. A
DWG NO.	PSMP6P4CFT	PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com